


Installation Guideline for the KTM 1050/1190/1290 Soft Luggage Pannier Racks

03 November 2015

Part	Description	Qty
1	Pannier Rack, Left Section	1
2	Pannier Rack, Right Section	1
3	Spacer, 8mm, ID 8mm	4
4	Washer, M8	8

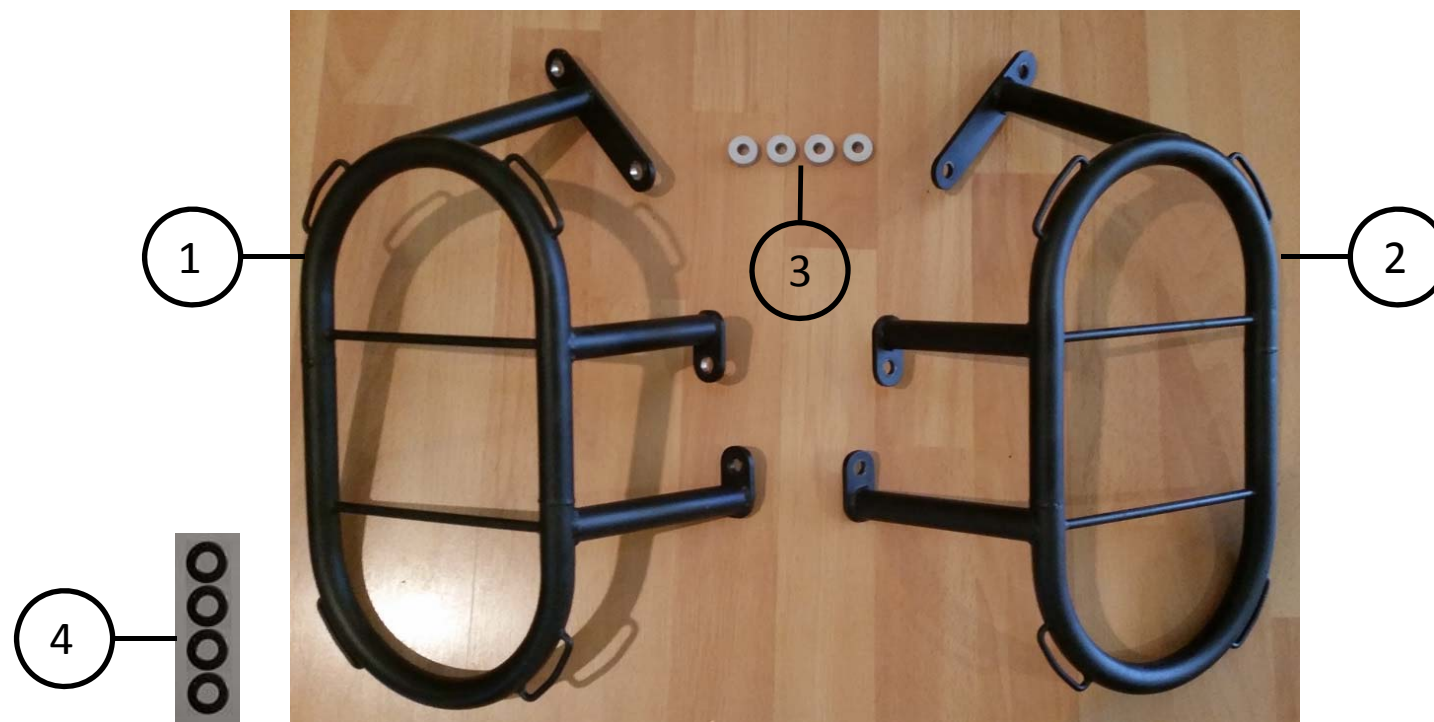

The installation of the pannier racks is done by executing the following steps sequentially. Existing bolts on the motorbike are to be re-used.

Step 1

Remove the stock plastic pannier brackets on the left side of the motorcycle by unscrewing the five bolts as shown. Retain the bolts and note the position they were removed from.



Step 2

Remove the stock plastic pannier brackets on the right side of the motorcycle by unscrewing the five bolts as shown. Retain the bolts and note the position they were removed from.




Step 3

Reinsert and secure the rear bolt on both sides of the motorcycle.



Step 4

Locate the left pannier rack (1) into position and using two of the spacers (3) and washers (4) provided, secure the top two attachment arms into place. The spacer is positioned between the rack and the motorcycle. The washer is positioned between the bolt head and the rack. **Do not tighten the bolts yet.**

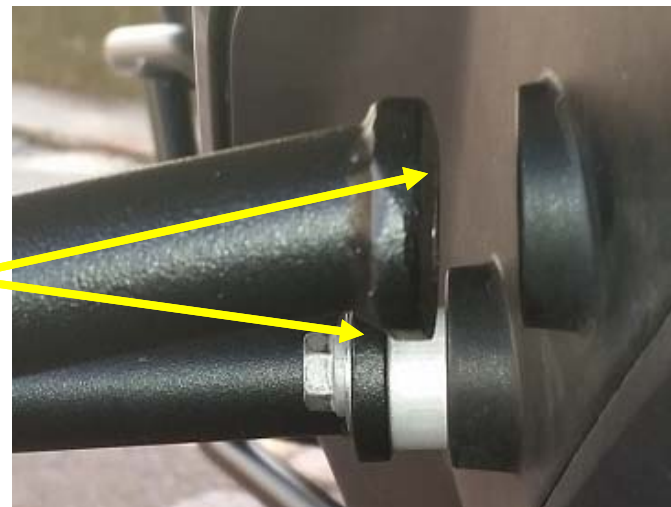

Step 5

Secure the bottom bracket into position by inserting the last two bolts into place with two of the washers (4) provided. With the left pannier rack in position, tighten all four bolts.



Step 6

Locate the right pannier rack (2) into position and using two of the spacers (3) and washers (4) provided, secure the top two attachment arms into place. The spacer is positioned between the rack and the motorcycle. The washer is positioned between the bolt head and the rack. **Do not tighten the bolts yet.**



Step 7

Secure the bottom bracket into position by inserting the last two bolts into place with two of the washers (4) provided. With the right pannier rack in position, tighten all four bolts.

